

Vouge Pro

12" or 15" High-end Slim POS

with Detachable LCD

or VFD Customer Display



The Vouge Pro is a top of the line touch POS terminal designed to operate under the harshest retail and hospitality environments. With a sleek and lean aluminum exterior, small footprint and upright design, the Vouge Pro fits into space-constricted environments while conveying a clean and modern presentation.



Features

Small Footprint and Upright Design: Dimensions 325 x 430 x 255mm (W x H x D)

Space saving and sleek design

Upright elongated design delivers a sophisticated look for high-end environments such as fashion apparel and hotel



Downward Facing I/O Connector Panel

Clean and professional workspace

Neatly conceals cabling under terminal for workspace



Detachable 2nd Display or VFD Display

Easy installation


Optional 2nd display or VFD display is attached without additional poles, mounts or wiring

Dual HDD Supporting Raid Function


Reliable storage

Provides secure data protection as well as a faster and safer data backup

I/O Interface

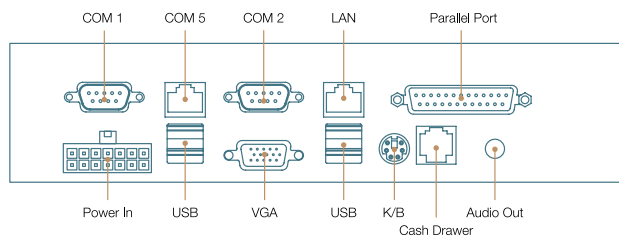

Dimensions

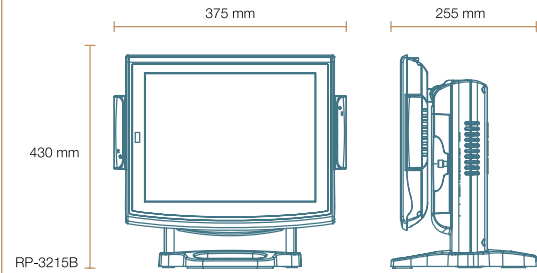

Specifications

Model	RP-3212B	RP-3215B
Processor	Intel® Celeron® 440 2.0 GHz / Dual-Core E5300 2.6 GHz	
System Memory	1 GB Standard, Maximum 4 GB (2 x 240-pin DDR2)	
Power Supply	270W External Power Supply with 12V/24V Output	
Storage Device	1 x 2.5" SATA HDD, 2nd 2.5" SATA HDD (Optional)	
	1 x CF Card (Optional)	
	RAID Function (0, 1, 10)	
Speaker	Built-in 2W x 2	
Construction	Aluminum Die-casting, Plexi-Glass Acrylic (Front Bezel)	
Housing Color	Black	
Touch LCD Display		
Size / Resolution	12.1" TFT LCD / 800 x 600	15" TFT LCD / 1024 x 768
Brightness	400 cd/m ²	250 / 350 cd/m ²
Touch Screen	5-Wire Resistive Touch	
I/O Ports		
Serial Port	3 x External : COM1 & COM2 (DB9), COM5 (RJ45) with 5V/12V/RI Selectable	
USB Port	5 x External (1 in Side, 4 in Bottom)	
Printer Port	1 x Bi-directional Parallel Port	
Cash Drawer Port	1 x 12V RJ11	
PS/2	1 x Keyboard	
LAN Port	1 x RJ45 Giga LAN	
Video Port	1 x VGA (DB15)	
Audio Port	1 x Line-out	
OS Supported		
Windows	Windows XP, Windows XPE, POSReady 2009, Windows 7	
Linux	Per Request	
Physical Dimensions		
Dimensions (WxHxD)	325 x 430 x 255 mm	375 x 430 x 255 mm
Environment		
EMI / Safety	CE, FCC Class A	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)	
Storage Temperature	-10°C ~ 50°C (14°F ~ 122°F)	
Relative Humidity	10% ~ 90% (Non-condensing)	
Optional Peripherals		
Magnetic Stripe Card Reader	MCR Single / Dual / Triple Track	
2-in-1 / 3-in-1 Module	MCR + i-Button / MCR + RFID / MCR + Fingerprint / MCR + Smartcard + i-Button	
2nd Display	12.1" / 15" TFT LCD with Touch / Non-touch	
Customer Display	Integrated VFD / LCM Customer Pole-Display	
Wireless LAN	802.11 b/g/n Wireless LAN Module (USB interface)	